


Fi. 140 / HDG _ HEADRIG _ SAWMILL BANDSAW - BAND MILL - 55" BANDWHEEL



FI.140 / HDG _ HEADRIG _ SAWMILL BANDSAW – BANDMILL - 55” BANDWHEEL

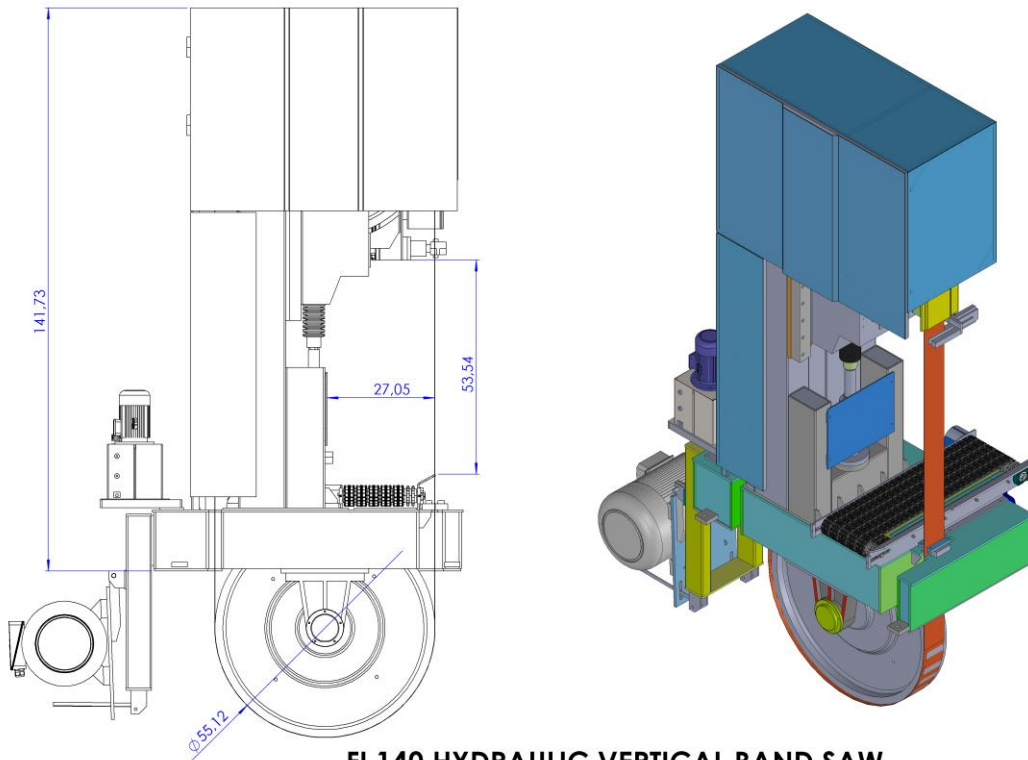

FI.140 HYDRAULIC VERTICAL BAND SAW

FİMAKSAN reserves the right to make changes in the model and dimensions without prior notice.

	DATE	DRAWN BY : MUSTAFA DURSUN	MATERIAL :	DRAWING NO. :
	27.10.2021	CONTROL BY: A.SAMET FIDANCI		SHEET NO. :

Technical Details & Specifications

Bandwheel Diameter	55 ^{1/8} ”
Flywheel Width	7 ^{3/32} ”
Max. Log Cut Height	Max: 59”
Max. Cut Width	Max: 27”
Main Motor	75 kW / 100 HP / 1400 rpm
Bandsaw Strain (Tensioning)	Hydraulic Powered
Sawblade Guide	Hydraulic Powered
Hydraulic Unit	4 kW Motor
Flywheel (Bandwheel)	Cast Iron
Bottom & Top Bearings	SKF C3
Sawblade Size max. (W x T x L)	Max: 7 ^{7/8} ”x 0 ^{1/16} ”x 421”
Sawblade Size min. (W x T x L)	Min: 7 ^{3/32} ” x 0 ^{1/16} ”x 409”
Sawblade Diesel Sprayer System	Automatic with Push Button
Electric Panel (Star Delta)	First-class material. Mounted
Flender type Belt drive for bandwheel	Mounted on the machine.
Bearings Lubrication System	Manually Lubrication thru Grease Fittings
Bottom Flywheel Dust Scraper	Automatic. Pneumatic Powered
Body Structure	Reinforced Thick Steel

FEATURES



Hydraulic Unit



Automatic Diesel Sprayer Unit for blade



Sawn board & sawdust Removal chain



View without Cabin